



Series XC680

Digital displays for work safety

Operating instructions (version 3.00)

1 Contact

www.siebert-group.com

GERMANY

Siebert Industrieelektronik GmbH
Siebertstrasse, D-66571 Eppelborn
Phone +49 (0)6806 980-0
email: info.de@siebert-group.com

AUSTRIA

Siebert Österreich GmbH
Simmeringer Hauptstrasse 24, A-1110 Wien
Phone +43 (0)1 74040153
email: info.at@siebert-group.com

FRANCE

Siebert France Sarl
4 rue de l'Abbé Louis Verdet, F-57200 Sarreguemines
Phone +33 (0)3 87 98 63 68
email: info.fr@siebert-group.com

ITALY

Siebert Italia Srl
Via Galileo Galilei 2A, I-39100 Bolzano (BZ)
Phone +39 (0)471 053753
email: info.it@siebert-group.com

THE NETHERLANDS

Siebert Nederland B.V.
Jadedreef 26, NL-7828 BH Emmen
Phone +31 (0)591-633444
email: info.nl@siebert-group.com

SWITZERLAND

Siebert AG
Bützbergstrasse 2, CH-4912 Aarwangen
Phone +41 (0)62 922 18 70 (german)
+41 (0)62 922 20 44 (french)
+41 (0)62 922 28 38 (italien)
email: info.ch@siebert-group.com

2 Legal note

© Siebert Industrieelektronik GmbH

This operation manual has been prepared with the utmost care. However, we do not accept any liability for possible errors. We always appreciate your suggestions for improvement, corrections, comments and proposals. Please contact us: editing@siebert-group.com

Siebert®, LRD® and XC-Board® are registered trademarks of Siebert Industrieelektronik GmbH. All other product names mentioned herein may be trademarks or registered trademarks of their respective owners.

We reserve the right to make alterations to the technical data and delivery options without notice. All rights reserved, including the rights of translation. No part of this document may in any form or by any means (print, photocopy, microfilm or any other process) be reproduced or by using electronic systems be processed, copied or distributed without our written permission.

Table of contents

1 Contact	2
2 Legal note	3
3 Safety precautions	5
Important information	5
Safety	5
Intended use	5
Mounting and installation	5
Grounding	6
EMC measures	6
Cleaning	6
Disposal and return of old devices	6
Batteries and rechargeable batteries	6
4 Unit description	7
Model designation	7
Brightness control	7
Energy saving mode	7
Display accuracy	8
Battery	8
Opening and closing the unit	8
5 Installation	12
Requirements to the installation site	12
Mounting kit	12
Mounting of the device	13
6 Connection to power and data lines	14
Power supply connection	14
Connecting the Ethernet data cable	15
Connecting the USB cable	15
7 Notes on commissioning	16
Interfaces	16
Displays with infrared remote control	16
Displays with Ethernet, USB, or Bluetooth interfaces	17
Start-up and testing	17
8 Technical data	18
9 Service and support	19

3 Safety precautions

Important information

Read these operating instructions before using the device. It contains important information on the use, safety and maintenance of the device. This helps you to protect yourself and prevent damage to the device.



Instructions that may lead to death, personal injury or considerable material damage if they are not followed or not followed correctly are highlighted by the warning triangle shown here.

The operating instructions are intended for trained professional electricians familiar with the safety standards of electrical technology and industrial electronics. The manufacturer is not liable if the information in these operating instructions is not complied with.

Store these operating instructions in an appropriate place.

Safety



Components inside the devices are energized with electricity during operation. For this reason, mounting and maintenance work may only be performed by qualified personnel in accordance with the relevant safety regulations.

The repair and replacement of components and modules may only be carried out by the manufacturer for safety reasons and due to the required compliance with the documented unit properties.

The devices do not have a power switch. They are in operation immediately after the operating voltage is applied.

Intended use

The devices are intended for use in industrial environments. They may only be operated within the limit values stipulated by the technical data.

When configuring, installing, maintaining and testing the devices, the safety and accident-prevention regulations relevant to use in each individual case must be complied with.

Trouble-free, safe operation of the units requires proper transport, storage, installation, mounting and careful operation and maintenance of the devices.

Mounting and installation

The attachment options for the units were conceived in such a way as to ensure safe, reliable mounting.



The user must ensure that the fastening material used, the device carrier and the anchoring at the unit device are sufficient for secure mounting under the given on-site conditions.

The devices are to be mounted in such a way that they can be opened up while mounted. Sufficient space for the cables must be available in the unit near the cable entries.

Sufficient space is to be kept clear around the devices to ensure air circulation and to prevent the build-up of heat resulting from use. The relevant information must be heeded in the case of units ventilated by other means.



When the housing fasteners are opened, the front frame of the housing hinges out upward or downward (depending on the unit version) automatically.

Grounding

All devices are equipped with a metal housing. They comply with safety class I and require a protective earth connection. The connecting cable for the operating voltage must contain a protective earth wire of a sufficient cross section (DIN VDE 0106 part 1, DIN VDE 0411 part 1).

EMC measures

The devices comply with the current EU Directive (EMC Directive) and provide the required interference immunity. Observe the following when connecting the operating voltage and data cables:

Use shielded data cables.

The data and operating voltage cables must be laid separately. They may not be laid together with heavy-current cables or other interference-producing cables.

The cable thickness must be properly assessed (DIN VDE 0100 Part 540).

The cable lengths inside the units are to be kept as short as possible to prevent interference. This applies especially to unshielded operating voltage cables. Shielded cables are also to be kept short due to any interference which might be emitted by the shielding.

Neither excessively long cables nor cable loops may be placed inside the units.

The connection of the cable shielding to the functional ground (PE) must be as short and low-impedance as possible.

Cleaning

Cleaning

Use a scratch-resistant cloth to clean the front panel. Do not clean the device with a steam cleaner or pressure washer. Take care not to apply too much pressure. This can damage the front panel.

Clean the device only with a damp cloth, not a wet one, to prevent moisture getting inside the device.

Disposal and return of old devices



Dispose the packing in an environmentally friendly manner. This device is subject to the European directive on waste electrical and electronic equipment (WEEE). The directive provides the framework for the EU-wide take-back and recycling of old appliances.

Enquiries therefore should be sent by e-mail to the following e-mail address:
info@siebert-group.com

Units or unit parts which are no longer needed are to be disposed of in accordance with the regulations in effect in your country. Personal data on the old appliances to be disposed of must be deleted by the user.

Batteries and rechargeable batteries



As an end user, you are legally obliged (Battery Ordinance) to return all used batteries and rechargeable batteries. Disposal in household waste is prohibited!

Batteries/rechargeable batteries containing harmful substances are marked with the symbols shown here, which indicate that they must not be disposed of in household waste. The designations for the relevant heavy metal are:

Cd = cadmium, Hg = mercury, Pb = lead (the designation is on the battery/accumulator, e.g. under the waste bin symbols shown on the left).



You can hand in your used batteries/accumulators free of charge at your local community collection point or wherever batteries/accumulators are sold.

In doing so, you are fulfilling your legal obligations and making your contribution to environmental protection.

4 Unit description

Model designation

This manual applies to devices of the XC680 series.

The devices are available for indoor or outdoor use:

Order-code	Application
XC6xx-xxx- N -xx	Units for indoor use, protection type IP40
XC6xx-xxx- A -xx	Units for outdoor use, protection type IP54

The scope of information consists of the following characteristic values which you assign to the various fields according to the specific front foil during the first start-up:

- Acciden-free days
- Number of accidents
- Accident-free days record
- Workdays lost
- Custom fields 1 to 6

For each characteristic you can enter a fixed number. Alternatively, you can activate the automatic function to ensure that the field is counted by one further at midnight. Therefore, the display must be switched on at midnight.

Furthermore, the following information can be displayed as required:

- Current time in HH:MM format
- Current date in DD.MM, DD.MM.YY or DD.MM.YYYY
- Air temperature and humidity with additional sensor

Brightness control

The brightness of the LEDs can be manually adjusted to the ambient brightness.

Alternatively, the automatic brightness control can be activated with the 'SafetyDisplayConfigurator' (does not apply for displays with infrared control (XC6xx-xxx-x-02)). The display automatically adjusts its luminosity to the ambient brightness. If the ambient brightness is lower, for example in cloudy sky or at night, the display dims down automatically to avoid glare effects e.g..

At high ambient brightness the display increases its brightness for better readability.

Energy saving mode

With the configuration program 'SafetyDisplayConfigurator' the energy-saving mode can be switched on (does not apply for displays with infrared control (XC6xx-xxx-x-02)).

In this mode, all LEDs are automatically dimmed at a user-defined point of time and re-activated at another point of time. During the darkening mode only a decimal dot flashes briefly every 30 seconds.

Energy consumption can thus be significantly reduced during the time in which the display is not read, for example at night.

Display accuracy

Fields to which you have assigned the 'automatic counting' property during configuration with the 'SafetyDisplayConfigurator' will increment by one at approximately midnight each day. Typically, this refers to the counter for accident-free days.

This function requires that the display is in operation around the clock. In the event of a power outage, the time of the automatic increment will be delayed by the duration of the outage.

Every time you make a change using the 'SafetyDisplayConfigurator', the time is reset to midnight.


Battery

The battery (lithium battery, type CR2032) is responsible for the power reserve of the real-time clock. It is located in a battery holder and should be replaced after three years.


Opening and closing the unit

The display must be opened for installation and to connect the power supply.

To access the device, remove the connector strips and carefully lift off the front panel.

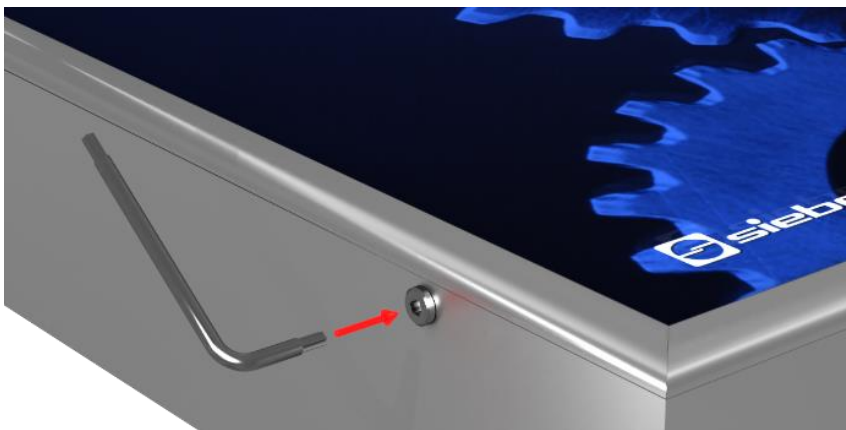

On devices intended for outdoor use, the connector strips are secured all around with Torx screws as an additional safeguard against accidental opening. A matching Torx wrench is included in the mounting kit for installation and removal.

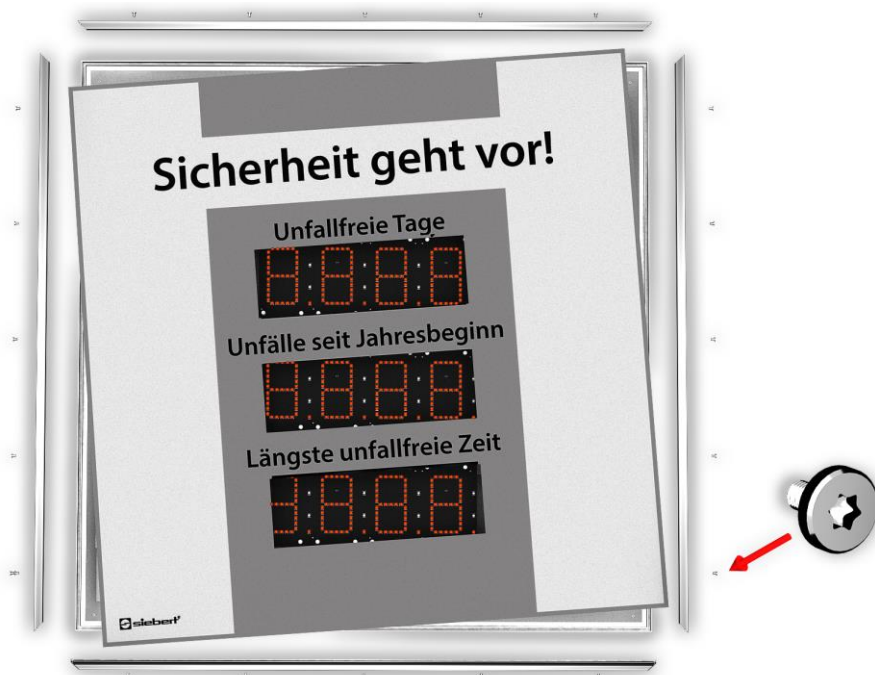


To open the device remove the Torx screws and keep them carefully for later assembly.




Open the device by using the lever tool. First remove the connectors and then the front pane.

Upon delivery, the connectors are only applied loosely.

To close the device, reinsert the front panel and the connector strips.

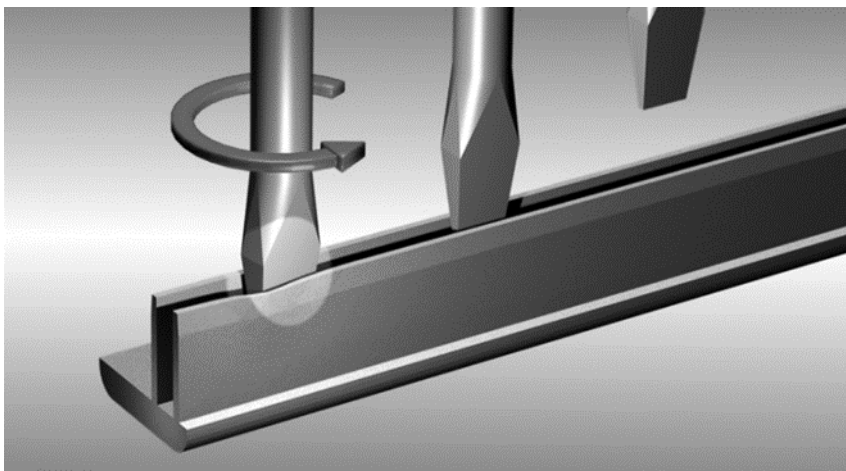

Lightly spread the snap-on strips with a screwdriver before inserting them so that they are firmly positioned in the housing frame. Check that the snap-on strips are so firmly secured after insertion that they cannot be removed without a tool (lever tool).

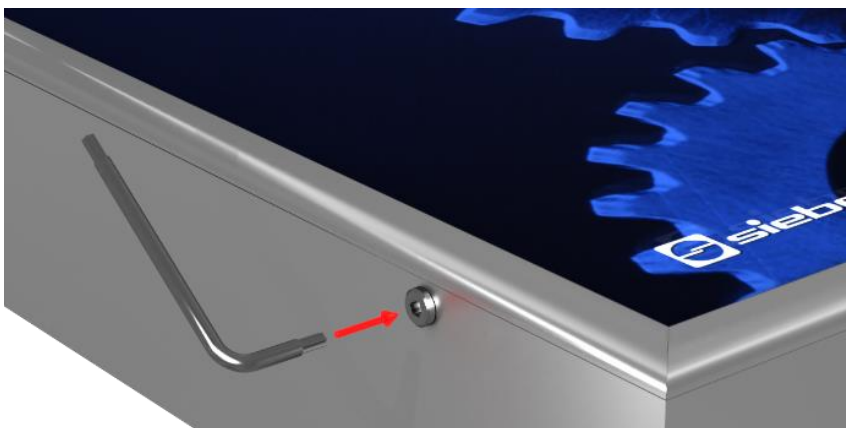

For devices intended for outdoor use, the plug-in strips must be secured to the housing frame with the Torx screws after insertion. Use the supplied screwdriver for this purpose.

Fig. 1


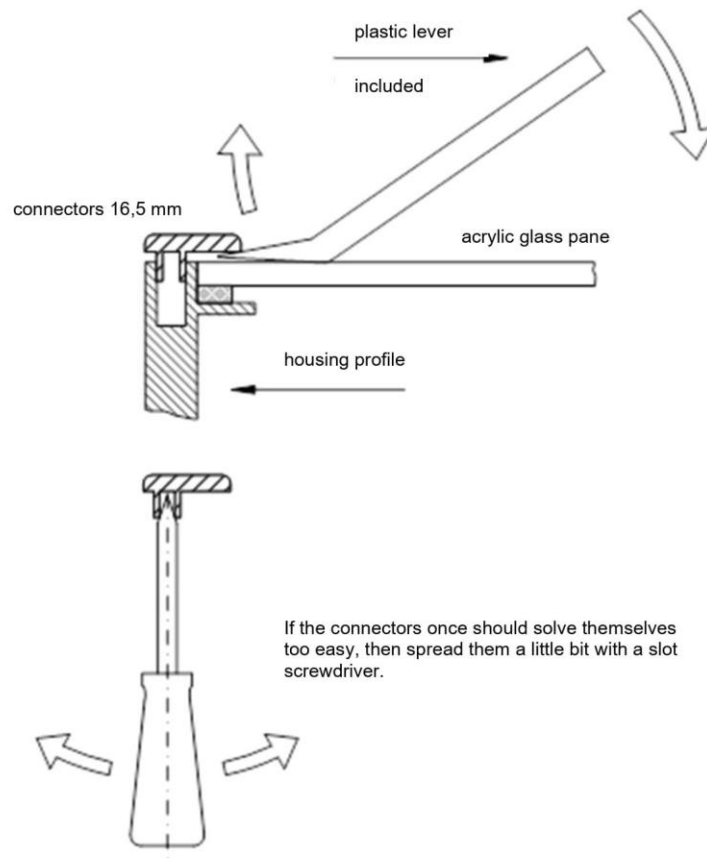


Fig. 2



Devices for indoor use have 16.5 mm wide connectors (Figure 1). Devices for outdoor use have 25 mm wide connectors (Figure 2), which are additionally secured with screws.

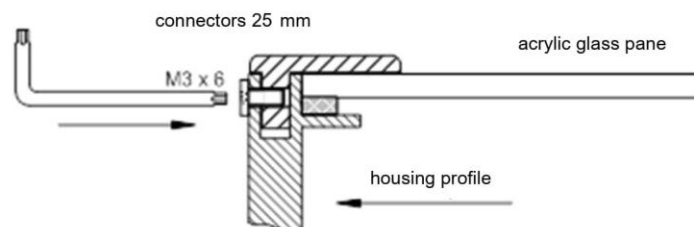

CAUTION!

For safety reasons, carefully close the display after commissioning.



WARNING!

If the plug-in strips are not securely fastened or screwed in place, they can be removed by unauthorized persons or can come loose on their own. As a result, the front panel may fall out, and live parts may be exposed.

5 Installation

Requirements to the installation site

The display is designed for wall mounting. The wall surface has to be plane and free of irregularities. The wall must have a sufficient load-bearing capacity.




ATTENTION!

If the wall surface, where the device is to be mounted, is uneven the housing may warp and become damaged when mounted on the wall.

Mounting kit

The installation material shown below is included in delivery:

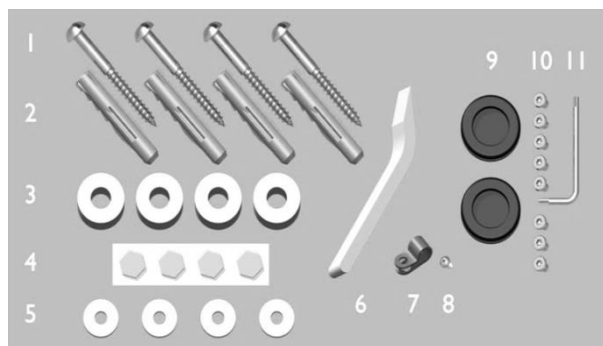

- 1 Screws for wall mounting
- 2 Dowels for wall mounting
- 3 Spacers for wall mounting
- 4 Self-adhesive strips to hold the spacers
- 5 Washers
- 6 Lever tools
- 7 Grounding clamp
- 8 Sheet-metal screw for grounding clamp
- 9* Cable grommet seals
- 10* Torx screw
- 11* Torx screwdriver


* only devices for outdoor use

Keep the lever tools and the screwdriver.

Mounting of the device

The power supply cable and the data cable (Ethernet or USB cable) are fed into the device through the feed-through holes in the rear or bottom of the housing.

Mount the device to the wall using the mounting holes and appropriate screws and anchors.

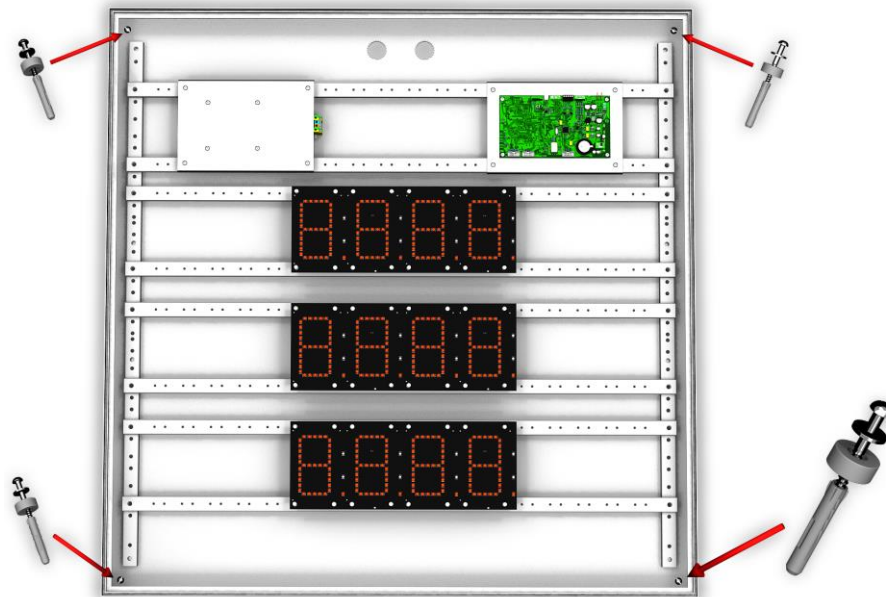

If the supplied screws and anchors are not suitable, use appropriate fastening materials instead.

The spacer washers, when used with the screws, allow mounting of the device at a distance of approximately 10 mm from the wall.



The cables can then be fed between the wall and the device (surface mounting). Use the included hexagonal adhesive pads to secure the spacer washers during installation.

6 Connection to power and data lines

Power supply connection



DANGER!

Risk of electric shock. The device contains dangerous voltages that can lead to death if handled improperly.

Installation must only be carried out by qualified personnel.

After mounting the device on the wall, connect the power cord to the terminal block. Ensure that the 230V cable has not been damaged at any point when inserting it into the device.

The device has a metal housing. It complies with Protection Class I and requires a protective earth connection. The connection cable for the operating voltage must include a protective earth conductor with sufficient cross-sectional area (DIN VDE 0106 Part 1, DIN VDE 0411 Part 1).




Connect the individual wires to the terminals on the terminal block labeled PE, L, and N.

The protective conductor (yellow/green) can be connected to either of the two yellow/green terminals. Ensure that the power cord has sufficient strain relief.

Immediately after switching on the power supply, a red LED flashes on the control unit. It goes out after a few seconds. Numbers appear on all displays when the unit is first switched on. Depending on the device model, - after configuration has been completed - the decimal points light up when turned on later.

Connecting the Ethernet data cable

Only valid for displays with Ethernet interface (XC6xx-xxx-x-05).

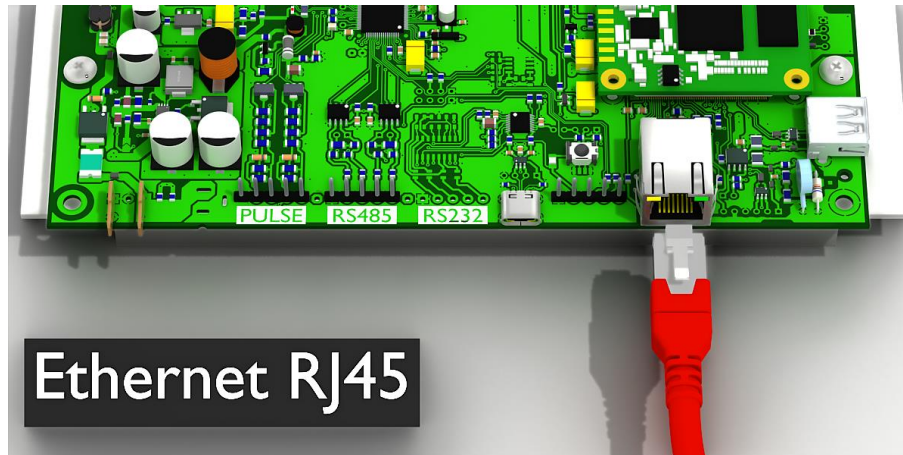


Displays with Ethernet interface are connected with an Ethernet cable cat. 5 or higher. Modern PCs or laptops recognize the cable type automatically.

If your display is operated with older network components, the following cables are required:

- a crosses Ethernet cable cat. 5 or higher for a direct connection to the PC or laptop with the display
- an Ethernet patch cable cat. 5 for the connection of the PC or laptop via a network switch or -hub with the display

Connecting the USB cable

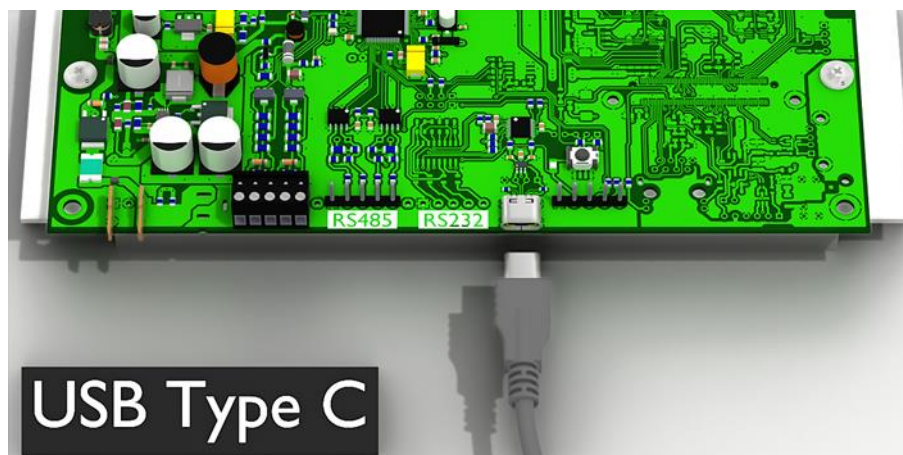

A suitable USB cable (USB Type C to USB Type A) is included in delivery.

7 Notes on commissioning

The safety displays can be configured and operated via various interfaces. In addition to a PC or laptop, you will need additional tools for configuration and operation, depending on the display's interface (not for displays with infrared remote controls).

Interfaces

The following interface variants are distinguished:

Order no.	Interface
XC6xx-xxx-x-02	Infrared remote control
XC6xx-xxx-x-03	USB (socket type C)
XC6xx-xxx-x-04	USB (socket type C) or Bluetooth
XC6xx-xxx-x-05	Ethernet (RJ45)

The configuration and changing of values is carried out via the Windows program 'SafetyDisplayConfigurator' included in delivery (exception: display with infrared remote control).

Displays with infrared remote control

No PC software is required for displays with infrared remote control. The operation is carried out with the remote control included in delivery.

The complete operating concept is described in detail in the following user manuals:

- Devices with HAMA remote control



Series XC600 – Digital displays for safety at work with HAMA V2 remote control

Series XC600 – Digital displays for safety at work with HAMA V1 remote control (devices up to serial number 10100716)

- Devices with Thomson remote control



Series XC600 – Digital displays for safety at work with infrared remote control

These can be found on the following website:




Series XC600

manuals.siebert-group.com/xc600

Displays with Ethernet, USB, or Bluetooth interfaces

The display is configured, and all network parameters (network addresses, protocols, etc.) are set, exclusively by using the Windows software 'SafetyDisplayConfigurator'.

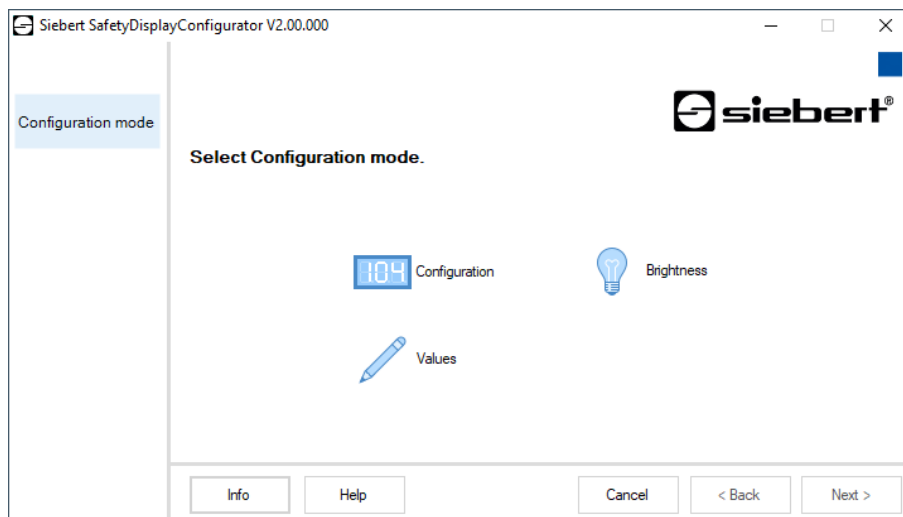

The necessary steps are described in detail in documentation of the program 'SafetyDisplayConfigurator'.

You can find this documentation and the 'SafetyDisplayConfigurator' software on the following website:



Series XC600

manuals.siebert-group.com/xc600

Once you have successfully completed the configuration, the software is only needed to reset the accident-free days in the event of an accident.


Start-up and testing

It is advisable to perform a functional test before locking the device.

8 Technical data

Dimension (W x H x D)	1000 x 1000 x 62 mm
Weight	approx. 18 kg
LED display digit height	100 mm
Power consumption	75 W max.
Operating voltage	115/230 (100...264) V AC, 50/60 Hz ± 20 %
Protection type	IP40, optional IP54*
Housing material	Aluminum, silver anodized
Front panel	Acrylic glas with film on the front or back
Operating temperature	0...40 °C, optional -20...50 °C*
Relative humidity	< 90 %, non-condensing
Storage temperature	-25...85 °C

* Devices with equipment package for outdoor use

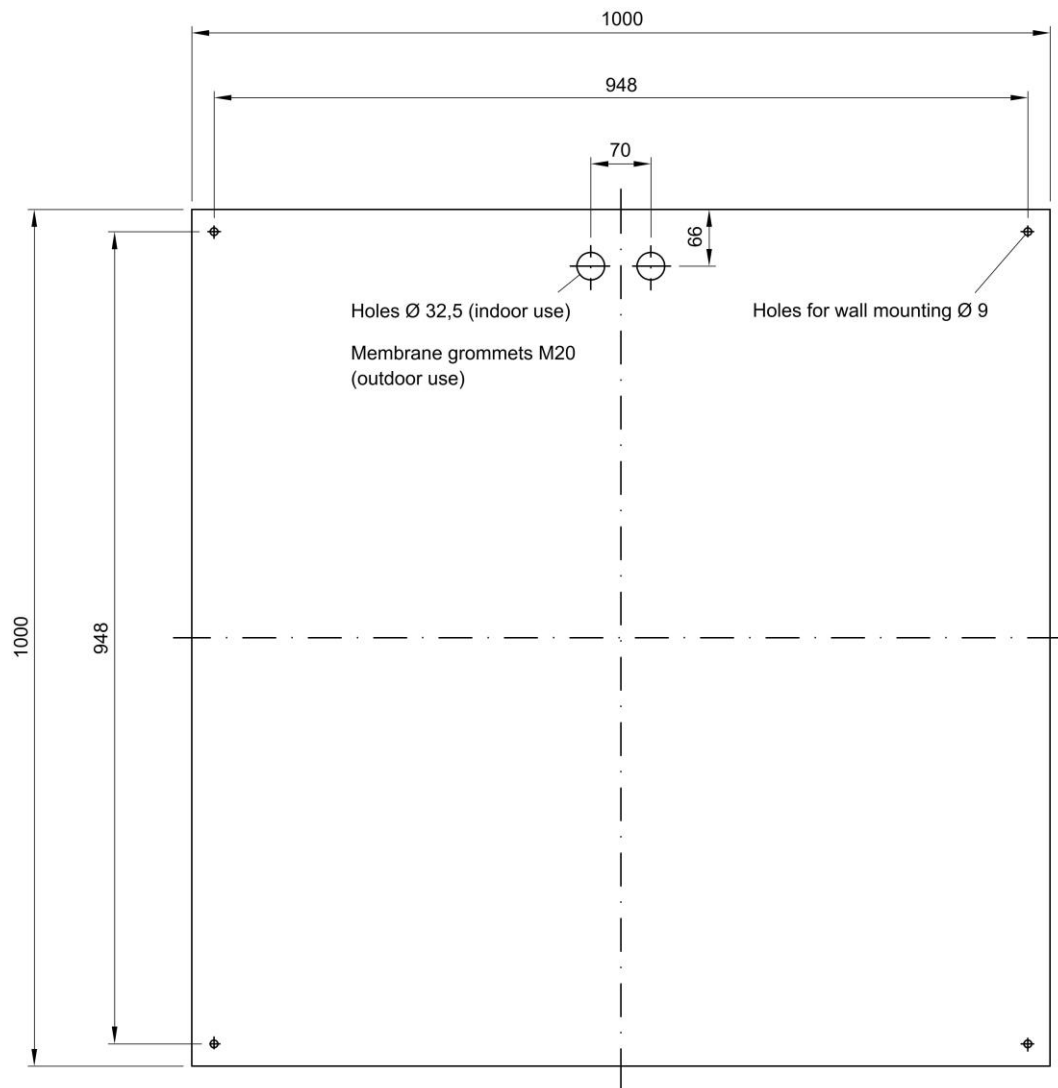

9 Service and support

If you have any questions or need help troubleshooting, we are happy to assist you. For this purpose, please contact one of the support addresses listed in chapter 1 by phone or email.

To ensure we can assist you quickly and efficiently, please have the following information ready when contacting us:

1. Information on the nameplate, particularly the model and serial number
2. A detailed description of the problem and the circumstances
3. A phone number and email address where you can be reached for follow-up questions