

# Series SX602

## Alphanumeric large size displays



The SX602 series comprises single line alphanumeric large size displays. With character heights up to 250 mm they are suitable for long reading distances. The LED matrix is ready for marquee, so that longer texts can also be displayed by devices with a smaller number of characters.



### Menu-guided parameterization

After opening the housing the menu display is visible inside the device. Operation modes, parameters and device functions are defined without the need of the main display to be visible – an operational convenience especially with large volume devices or at exposed installation sites.




### Interfaces for industrial data communication

The large size displays support the interfaces for the industrial communication: field buses, network topologies, serial control, etc.

### Readable one- or double-sided

The large size displays are offered either with a one- or a double-sided display. The versions with a double-sided display have a LED matrix on the front and on the rear side and show the same information on both sides.

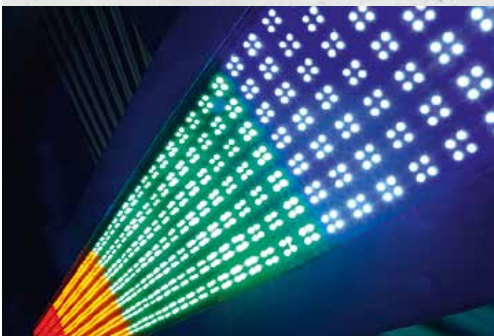

### Function inputs

The devices are equipped with PLC-compatible function inputs. They allow the activation of device functions such as flashing, blanking and reduction of the LED brightness (day/night mode) independent from the signals over the data interface.

### Easy mounting and installation

The front frame is locked with quick-action releases. When opening the unit the front frame hinges downward. Connectors, modules and controls are now directly accessible without disassembling housing parts.



### Text memory

Fixed texts are defined with an address in the internal text memory. Upon receipt of an address the corresponding text appears in the display. This operating mode is advantageous if recurring texts are displayed. Variable information such as current measured values, quantities or time and date can be displayed in the texts. A fixed text can also be used as initial text at power on, e.g. "System trouble-free".

**Standard units**



<b>50 mm character height</b>	<b>20 characters<sup>1</sup></b>	<b>40 characters<sup>1</sup></b>
One-sided display	SX602-20/05/0x100/0A-xx	SX602-40/05/0x-100/0A-xx
Double-sided display	SX602-20/05/0x-200/3A-xx	SX602-40/05/0x-200/3A-xx
Measures A x B	1040 x 250 mm	1960 x 250 mm



<b>160 mm character height</b>	<b>4 characters<sup>1</sup></b>	<b>6 characters<sup>1</sup></b>	<b>8 characters<sup>1</sup></b>
One-sided display	SX602-04/16/0x-100/0A-xx	SX602-06/16/0x-100/0A-xx	SX602-08/16/0x-100/0A-xx
Double-sided display	SX602-04/16/0x-200/3A-xx	SX602-06/16/0x-200/3A-xx	SX602-08/16/0x-200/3A-xx
Measures A x B	670 x 300 mm	960 x 300 mm	1240 x 300 mm



<b>160 mm character height</b>	<b>10 characters<sup>1</sup></b>	<b>12 characters<sup>1</sup></b>
One-sided display	SX602-10/16/0x-100/0A-xx	SX602-12/16/0x-100/0A-xx
Double-sided display	SX602-10/16/0x-200/3A-xx	SX602-12/16/0x-200/3A-xx
Measures A x B	1520 x 300 mm	1810 x 300 mm



<b>250 mm character height</b>	<b>4 characters<sup>1</sup></b>	<b>6 characters<sup>1</sup></b>	<b>8 characters<sup>1</sup></b>
One-sided display	SX602-04/25/0x-100/0A-xx	SX602-06/25/0x-100/0A-xx	SX602-08/25/0x-100/0A-xx
Double-sided display	SX602-04/25/0x-200/3A-xx	SX602-06/25/0x-200/3A-xx	SX602-08/25/0x-200/3A-xx
Measures A x B	1030 x 400 mm	1500 x 400 mm	1960 x 400 mm

<sup>1</sup> Applies to character set Acala 7

### Data interface

Ethernet IP	SX602-xx/xx/xx-xxx/xx-YE
Ethernet TCP/IP	SX602-xx/xx/xx-xxx/xx-E0
Profinet	SX602-xx/xx/xx-xxx/xx-YP
Profibus DP	SX602-xx/xx/xx-xxx/xx-K0
Modbus RTU	SX602-xx/xx/xx-xxx/xx-CM
Modbus TCP/IP	SX602-xx/xx/xx-xxx/xx-YT
Interbus Cu	SX602-xx/xx/xx-xxx/xx-YJ
RS485/RS232	SX602-xx/xx/xx-xxx/xx-S0
BCD/binary	SX602-xx/xx/xx-xxx/xx-P0

### LED color



White	SX602-xx/xx/xW-xxx/xx-xx
Red	SX602-xx/xx/xR-xxx/xx-xx
Green <sup>1</sup>	SX602-xx/xx/xG-xxx/xx-xx
Yellow <sup>1</sup>	SX602-xx/xx/xY-xxx/xx-xx

<sup>1</sup> Only in connection with LEDs for outdoor use



### Options

LED for outdoor use	SX602-xx/xx/2x-xxx/xx-xx
Housing with two-layer coating	SX602-xx/xx/xx-x1x/xx-xx
Housing V2A (stainless steel), varnished	SX602-xx/xx/xx-x2x/xx-xx
Housing V2A (stainless steel), brushed	SX602-xx/xx/xx-x3x/xx-xx
Housing V4A (stainless steel), brushed	SX602-xx/xx/xx-x5x/xx-xx
Protection type IP65	SX602-xx/xx/xx-xx1/xx-xx
Protection type IP54 with climate control	SX602-xx/xx/xx-xx2/xx-xx
Protection type IP54 with climate control and heating	SX602-xx/xx/xx-xx4/xx-xx
Protective weather cover	SX602-xx/xx/xx-xxx/xx-xx-1011

One-sided display

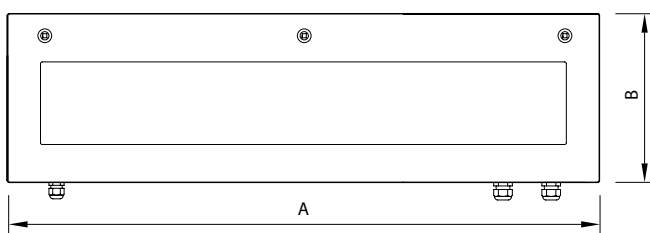

Double-sided display

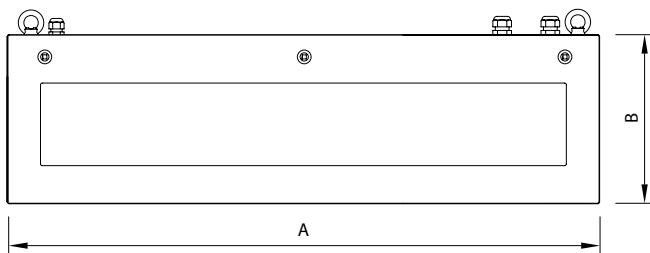

Dimensions in mm

### Technical data

Power supply	230 V AC $\pm 15\%$ , 50 Hz, optional 24VDC $\pm 15\%$ or 115 V AC $\pm 15\%$ , 60 Hz
Housing	Steel sheet, optional stainless steel, Varnishing RAL 5002 ultramarine blue/RAL 7035 light grey
Protection type	IP54, optional IP65

Detailed technical data see operating instructions.

[www.siebert-group.com](http://www.siebert-group.com)

**GERMANY**

Siebert Industrieelektronik GmbH  
Siebertstrasse  
D-66571 Eppelborn  
Phone +49 6806 980-0  
Fax +49 6806 980-999  
[info.de@siebert-group.com](mailto:info.de@siebert-group.com)

**FRANCE**

Siebert France Sarl  
4 rue de l'Abbé Louis Verdet  
F-57200 Sarreguemines  
Phone +33 3 87 98 63 68  
Fax +33 3 87 98 63 94  
[info.fr@siebert-group.com](mailto:info.fr@siebert-group.com)

**ITALY**

Siebert Italia Srl  
Via Galileo Galilei 2/A  
I-39100 Bolzano (BZ)  
Phone +39 0471 053 753  
Fax +39 0471 053 754  
[info.it@siebert-group.com](mailto:info.it@siebert-group.com)

**THE NETHERLANDS**

Siebert Nederland B.V.  
Jadedreef 26  
NL-7828 BH Emmen  
Phone +31 591 633 444  
Fax +31 591 633 125  
[info.nl@siebert-group.com](mailto:info.nl@siebert-group.com)

**AUSTRIA**

Siebert Österreich GmbH  
Mooslackengasse 17  
A-1190 Wien  
Phone +43 1 890 63 86-0  
Fax +43 1 890 63 86-99  
[info.at@siebert-group.com](mailto:info.at@siebert-group.com)

**SWITZERLAND**

Siebert AG  
Bützbergstrasse 2  
CH-4912 Aarwangen  
Phone +41 62 922 18 70  
Fax +41 62 922 33 37  
[info.ch@siebert-group.com](mailto:info.ch@siebert-group.com)

**INTERNATIONAL**

Argentina, Australia, Czech Republic, China, Colombia, Denmark, Estonia, Finland, Great Britain, Hong Kong, India, Island, Israel, Korea, Malaysia, Mexico, Norway, Poland, Russia, Singapore, Spain, South Afrika, Turkey

Siebert®, LRD® and XC-Board® are registered trademarks of Siebert Industrieelektronik GmbH. All other product names mentioned herein may be trademarks or registered trademarks of their respective owners. All information and data included in this documentation is provided without guarantee and is subject to change at any time without prior notification. All illustrations shall be without obligation and cannot be considered binding. The products shown may contain optional equipment. Availability and technical specifications are subject to change without prior notice. All rights to this documentation are reserved. Our current terms and conditions of sale and delivery apply exclusively (see [www.siebert-group.com](http://www.siebert-group.com), available upon request). 06-10.00.EN.0104